


Battery Powered Wireless LED Wall Sconce



OPERATING INSTRUCTIONS

1. Remove rear battery cover and place 6 AA cell batteries (we recommend alkaline or rechargeable batteries - not provided) with the polarity as shown in the battery door. Replace battery cover.
2. Determine where the product is to be mounted and insert nail or screw (not provided) in the wall. Mount back plate on wall by sliding hanging groove over inserted nail or screw.
3. Slide shade onto bracket and press fit the shade over the mounting pins to hold into place.
4. Push in button located on the bottom of the unit to power the unit on. Push button again to power the unit off.

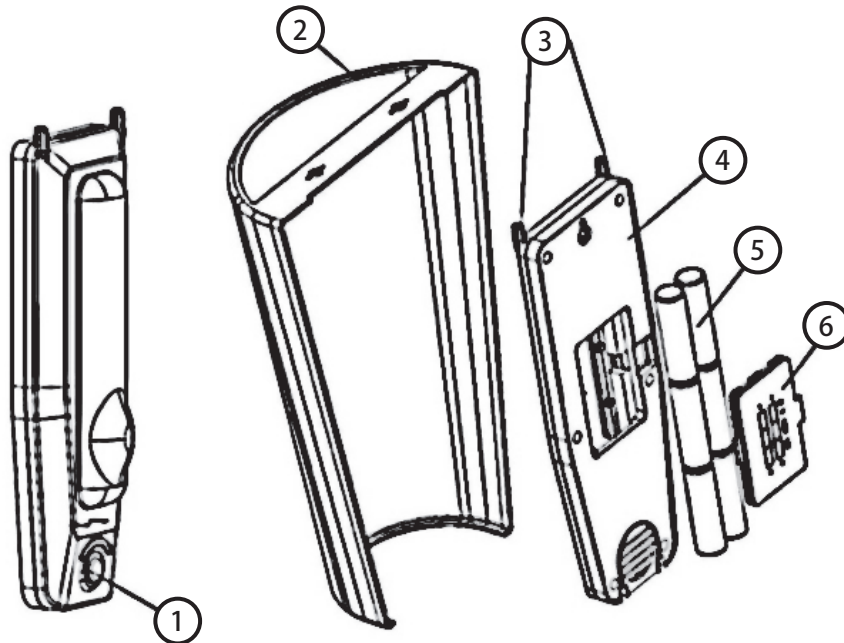

1. Power ON/OFF Switch
2. Lamp Shade
3. Mounting Pins
4. Sconce Main Unit
5. Batteries 6 x AA
6. Battery Cover

PLEASE NOTE

1. This unit contains a built in 4 hour timer which is activated immediately. The unit will power off after 4 hours of use. This helps maximize battery longevity. Unit can be turned back on manually to commence a new 4 hour session. Unit can be turned off manually at any time.
2. This unit features an automatic 24 hours timer that will allow the unit to turn on at the same time each day. To activate, simply turn the unit on (in either mode) and let the unit run for the 4 hour time period. The unit will automatically turn off after 4 hours of use and then turn on 24 hours after it was originally turned on. To override this feature simply turn the unit off by pressing the manual on/off button to off.

SAFETY

1. Do not disassemble the back plate.
2. To prevent equipment damage and possible injury, never mix batteries with different chemistries or voltages in the equipment at the same time.
3. Consumed batteries need to be disposed of properly. Follow the disposal instructions on the battery package. Battery selling retailers provide special containers for environmentally friendly disposal.
4. Remove batteries from unit for long term storage to prevent damage from battery leakage.

REPLACING BATTERIES

1. Remove rear battery cover remove old batteries and replace with new AA cell batteries (with the polarity as shown in the battery door). Replace battery cover. Dispose of used batteries as instructed.
2. Replace back plate on wall and slide shade onto bracket over mounting pins to hold into place.